



Value and Performance

- Black Body Corporation has re-engineered the graphic dryer oven.
- This conveyor oven series features unlimited flexibility and unsurpassed performance in a compact size.
- This oven line boasts 8 models, with a choice of belt materials, belt widths, conveyor lengths, oven chamber lengths and even oven chamber placement.
- BBC can now create a high performance oven to match your specific process.

Features

- Duct Collar Provided to Connect to Your **Current Exhaust System**
- Optional Exhaust Blower Available
- "Hassle-Free" Belt Tracking System
- Three Year Warranty on Heaters
- Disconnect Switch Included in Control Panel
- Optional Cooling Fan Bank
- Powder Coat Finish



- 8 Models
- Choice of Belt Material
 - Teflon Coated Fiberglass
 - Stainless Steel
- Two Belt Widths

36" 48"

Two Conveyor Lengths

8' or 10'

Two Oven Chamber Lengths

4' or 5'


Dual Voltage Ovens

Works on both 208 Volt & 240 Volt

Conveyors


- Choice of Belt Material
 - Teflon Coated Fiberglass
 - Stainless Steel
- Two Belt Widths Available 36" 48"
- Two Conveyor Lengths 8' or 10'
- "Hassle-Free" Belt Tracking System

• Two Oven Chamber Lengths 4' or 5'

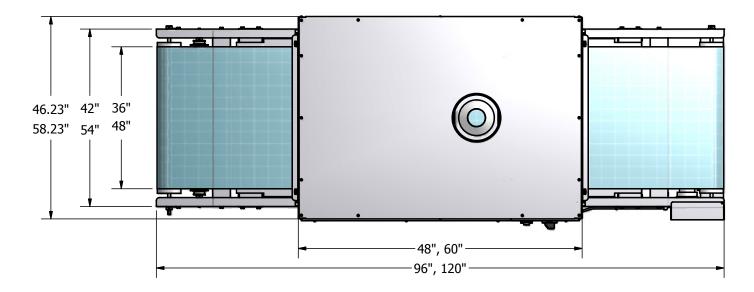

Oven Specifications

- Dual Voltage Ovens
 - Works on Both 208 Volt & 240 Volt
- Single and Three Phase Units Available
- Chamber can be positioned on conveyor to customize entrance and exit length
- Three Year Warranty on heaters
- Duct collar provided to connect to your current exhaust system

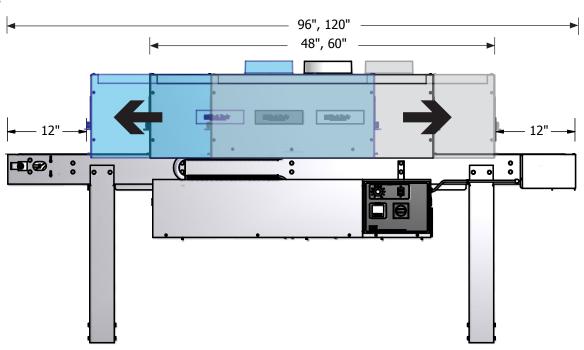



Donaloudius Ossasilus

Versatility

Production Capacity

36" Belt- 480 Garments per hour in 48" chamber - 600 in 60" chamber

48" Belt- 720 Garments per hour in 48" chamber - 900 in 60" chamber

Model	Сопием	Conveys	Chamber Chamber	Belt Males:	Entango	Exit Com.	Volts	Phase	Watts	Amps
36T08-4	36"	8'	48"	Teflon	24"	24"	208/240	Single	9,260/12,350	44.52/51.46
36T08-5	36"	8'	60"	Teflon	18"	18"	208/240	Single	13,400/17,860	64.42/74.42
36T10-4	36"	10'	48"	Teflon	36"	36"	208/240	Single	9,260/12,350	44.52/51.46
36T10-5	36"	10'	60"	Teflon	30"	30"	208/240	Single	13,400/17,860	64.42/74.42
48T08-4	48"	8'	48"	Teflon	24"	24"	208/240	Single	12,150/16,200	58.41/67.5
48T08-5	48"	8'	60"	Teflon	18"	18"	208/240	Three	18,480/24,640	51.36/59.34
48T10-4	48"	10'	48"	Teflon	36"	36"	208/240	Single	12,150/16,200	58.41/67.5
48T10-5	48"	10'	60"	Teflon	30"	30"	208/240	Three	18,480/24,640	51.36/59.34

Belt Tracking

- Hassle Free Belt Tracking
- Longer Belt Life
- No Down Time Adjusting Your Belt



Control Panel

- Digital Solid State Temperature Control on all models
- Digital Conveyor Controls standard on Stainless Steel Belt models
- Analog Conveyor Controls standard on Teflon Belt models, Digital **Control optional**
- Disconnect Switch included in **Control Panel**



