




ENM- 4192-00
LC-172 STAND - ASSEMBLY INSTRUCTIONS

ORIGINAL DOCUMENT

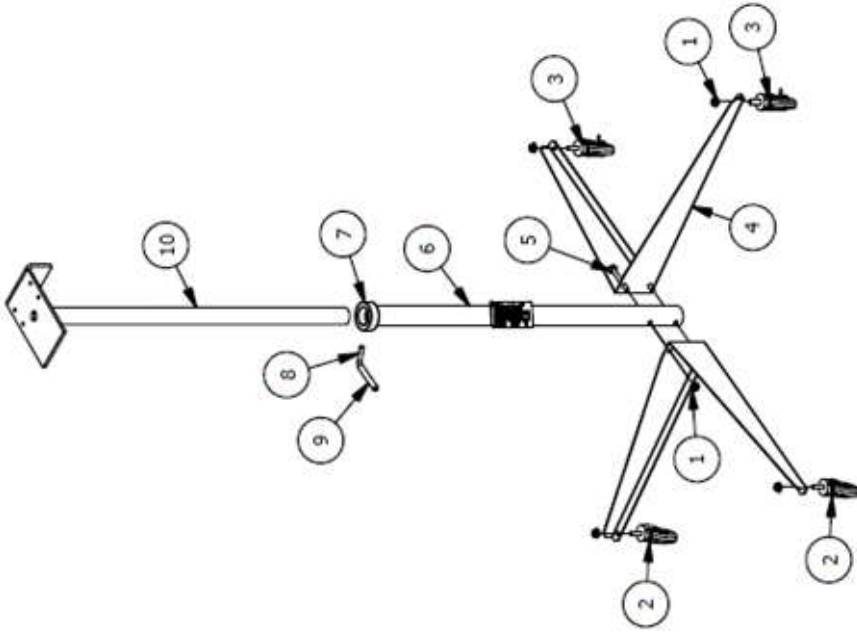

ITEM	QTY	BBC PART #	DESCRIPTION
1	6	24-008	NUT 5/16-18 SERRATED
2	2	28-012-1	CASTER 2"
3	2	28-012	CASTER 2" w/ BRAKE
4	2	LC98-09	LEG
5	2	25-032	BOLT 5/16-18 x 2.5L SERRATED
6	1	LC98-15	TUBE 1.63 DIA
7	1	13-141	COLLAR 1-7/16 ID
8	1	97-184	BENT BOLT
9	1	97-185	GRIP 0.31 ID x 2.75L
10	1	97-011	UPPER TUBE

Tools Required: Two 1/2" Open End Wrenches
IMPORTANT: ENSURE ALL PARTS ARE ENCLOSED.

1. Assemble LEGS [4] and CASTERS [2 & 3] using 4 NUTS [1].
2. Align holes in LEGS [4] with holes in TUBE [6] and secure with 2 BOLTS [5] and 2 NUTS [1].
3. Place COLLAR [7] at position for desired height on UPPER TUBE [10] and secure with BENT BOLT [8].
4. Insert UPPER TUBE [10] into TUBE [6].